

Motorised Vertical Test Stand SAUTER TVS · TVS-LD

PREMIUM




Motorised test stand incl. length measuring system LD

**Premium test stand with step motor for precise testing up to 50 kN – now also available as a set**




Premium operating panel

- Digital speed display for a direct reading of the displacement speed
- Digital repeat function for long-term stress test

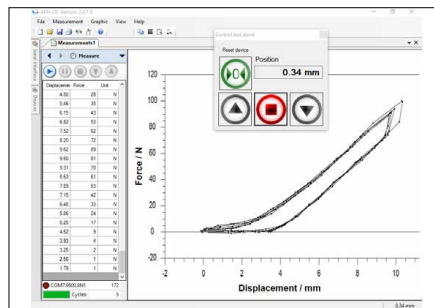


Control of the test stand using PC software SAUTER AFH

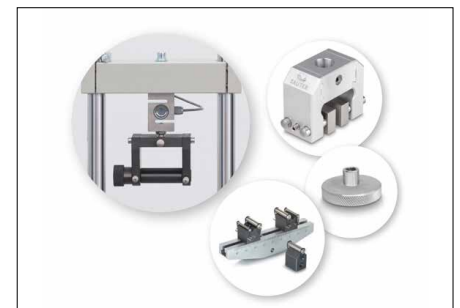

Solid and flexible fixing options for many clamps and accessories from the SAUTER product range, see *Accessories*

### Motorised Vertical Test Stand SAUTER TVS · TVS-LD

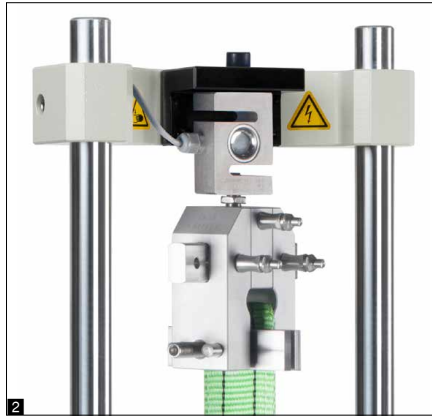

#### Features

- Motorised test stand for tension/compression force testing
- NEW: Now also available as a practical set TVS-LD for force-displacement-measurements in laboratory and industry
- Set TVS-LD: Five in one - premium motorised test stand, length measuring system LD, interface cable, data transfer software AFH LD, interface converter AFH 12 and mounting
- Stepper motor for greatest ease of use
  - for constant speed from the smallest to the maximum load
  - allows testing at minimum speed and full load
  - for higher positioning accuracy. Precise starting and stopping, without overrun, even at high speeds
  - precise adjustment of the displacement speed using the information shown on the display
- Maximum displacement protected by electronic end switches
- Large working area by means of long guide columns as standard, which allows a wide range of fixing options
- Only TVS: SAUTER LA length measuring device as standard, to read the travel distance with a readability of 0,01 mm

- Set TVS-LD: with linear potentiometer for length measurement to create force-displacement diagrams on PC, maximum measuring range 300 mm, readability 0,01 mm, measuring accuracy 0,5 % of [Max], USB-A cable 1,5 m, high data acquisition speed
- Set TVS-LD: Data Transfer Software SAUTER AFH LD included with the delivery
- Particularly flexible mounting options for variable force measuring devices, such as, for example, SAUTER FC, FH, FK, FL:
  - **1** Direct mounting of measuring devices with internal load cell up to a measuring range of 500 N (only for TVS 5000N240)
  - **2** Direct mounting of the external load cell on the traverse, starting with 1000 N measurement range and higher
  - **3** Holder for force measuring devices of the SAUTER FH range with external load cell

#### Technical data

- Maximum travel distance: 210 mm
- Speed accuracy: 1 % of [Max]
- Positioning accuracy when shutting down: ± 0,05 mm


#### Accessories

- Only TVS: Data transfer software with graphic display of the measurement process, force-time, SAUTER AFH FAST
- **3** Holder for force measuring devices of the SAUTER FH range with external load cell, SAUTER TVM-A01
- Force gauges see page 11 et seq., clamps and other accessories see page 39 et seq.

STANDARD				OPTION	
SCALE	SOFTWARE	STEPPER	2 DAYS	SOFTWARE	
TVS-LD				TVS	

Model	Measuring range	Speed range	Length of columns
	[Max] N	[Max] mm/min	mm
<b>SAUTER</b>			
<b>TVS 5000N240</b>	5000	1 - 240	1135
<b>TVS 10KN100</b>	10000	1 - 200	1135
<b>TVS 20KN100</b>	20000	1 - 70	1135
<b>TVS 50KN80</b>	50000	1 - 70	1135
Sets incl. test stand, length measuring system, interface cable, software AFH LD, assembly:			
<b>TVS 5000N240-LD</b>	5000	1 - 240	1135
<b>TVS 10KN100-LD</b>	10000	1 - 200	1135
<b>TVS 20KN100-LD</b>	20000	1 - 70	1135
<b>TVS 50KN80-LD</b>	50000	1 - 70	1135

**New model**

 <p><b>Adjusting program (CAL)</b> For quick setting of the instrument's accuracy. External adjusting weight required</p>	 <p><b>Bluetooth* data interface</b> To transfer data from the balance/measuring instrument to a printer, PC or other peripherals</p>	 <p><b>Measuring units</b> Weighing units can be switched to e.g. non-metric. Please refer to website for more details</p>	 <p><b>Conformity assessment</b> Models with type approval for construction of verifiable systems</p>
 <p><b>Calibration block</b> Standard for adjusting or correcting the measuring device</p>	 <p><b>WIFI data interface</b> To transfer data from the balance/measuring instrument to a printer, PC or other peripherals</p>	 <p><b>Measuring with tolerance range (limit-setting function)</b> Upper and lower limiting can be programmed individually. The process is supported by an audible or visual signal, see the relevant model</p>	 <p><b>DAkkS calibration possible</b> The time required for DAkkS calibration is shown in days in the pictogram</p>
 <p><b>Peak hold function</b> Capturing a peak value within a measuring process</p>	 <p><b>Data interface infrared</b> To transfer data from the measuring instrument to a printer, PC or other peripheral devices</p>	 <p><b>Protection against dust and water splashes IPxx</b> The type of protection is shown in the pictogram cf. DIN EN 60529:2000-09, IEC 60529:1989 +A1:1999+A2:2013</p>	 <p><b>Factory calibration (ISO)</b> The time required for factory calibration is specified in the pictogram</p>
 <p><b>Scan mode</b> Continuous capture and display of measurements</p>	 <p><b>Control outputs (optocoupler, digital I/O)</b> To connect relays, signal lamps, valves, etc.</p>	 <p><b>ZERO</b> Resets the display to "0"</p>	 <p><b>Package shipment</b> The time required for internal shipping preparations is shown in days in the pictogram</p>
 <p><b>Push and Pull</b> The measuring device can capture tension and compression forces</p>	 <p><b>Analogue interface</b> To connect a suitable peripheral device for analogue processing of the measurements</p>	 <p><b>Battery operation</b> Ready for battery operation. The battery type is specified for each device</p>	 <p><b>Pallet shipment</b> The time required for internal shipping preparations is shown in days in the pictogram</p>
 <p><b>Length measurement</b> Captures the geometric dimensions of a test object or the movement during a test process</p>	 <p><b>Analogue output</b> For output of an electrical signal depending on the load (e.g. voltage 0 V - 10 V or current 4 mA - 20 mA)</p>	 <p><b>Rechargeable battery pack</b> Rechargeable set</p>	
 <p><b>Focus function</b> Increases the measuring accuracy of a device within a defined measuring range</p>	 <p><b>Statistics</b> Using the saved values, the device calculates statistical data, such as average value, standard deviation etc.</p>	 <p><b>Plug-in power supply</b> 230V/50Hz in standard version for EU. On request GB, AUS or US version available</p>	
 <p><b>Internal memory</b> To save measurements in the device memory</p>	 <p><b>PC Software</b> To transfer the measurement data from the device to a PC</p>	 <p><b>Integrated power supply unit</b> Integrated, 230V/50Hz in EU. More standards e.g. GB, AUS or US on request</p>	
 <p><b>Data interface RS-232</b> Bidirectional, for connection of printer and PC</p>	 <p><b>Printer</b> A printer can be connected to the device to print out the measurement data</p>	 <p><b>Motorised drive</b> The mechanical movement is carried out by an electric motor</p>	
 <p><b>Profibus</b> For transmitting data, e.g. between scales, measuring cells, controllers and peripheral devices over long distances. Suitable for safe, fast, fault-tolerant data transmission. Less susceptible to magnetic interference</p>	 <p><b>Network interface</b> For connecting the scale/measuring instrument to an Ethernet network</p>	 <p><b>Motorised drive</b> The mechanical movement is carried out by a synchronous motor (stepper)</p>	
 <p><b>Profinet</b> Enables efficient data exchange between decentralised peripheral devices (balances, measuring cells, measuring instruments etc.) and a control unit (controller). Especially advantageous when exchanging complex measured values, device, diagnostic and process information. Savings potential through shorter commissioning times and device integration possible</p>	 <p><b>KERN Communication Protocol (KCP)</b> It is a standardized interface command set for KERN balances and other instruments, which allows retrieving and controlling all relevant parameters and functions of the device. KERN devices featuring KCP are thus easily integrated with computers, industrial controllers and other digital systems</p>	 <p><b>Fast-Move</b> The total length of travel can be covered by a single lever movement</p>	
 <p><b>Data interface USB</b> To connect the measuring instrument to a printer, PC or other peripheral devices</p>	 <p><b>GLP/ISO record keeping</b> of measurement data with date, time and serial number. Only with SAUTER printers</p>		