


# KERN EWJ 600-2M

High-quality precision balance with automatic internal adjustment, verification optional

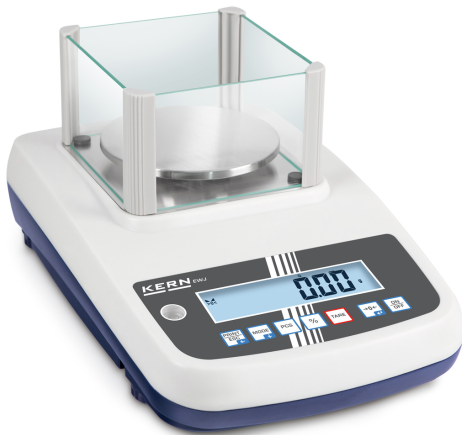

## Approval

CE mark	✓
Accuracy classe	II
Verification scale interval [e]	0,1 g
Conformity assessment possible ex works	✓

## Display

Display type	LCD
Display screen size	129 x 27
Display backlight	LED white
Display digit height	21 mm
Languages of the user interface	English Symbol language

## Construction

Dimension housing (W×D×H)	220×340×90 mm
Dimensions rectangular draught shield - inner (W×D×H)	134×128×80 mm
Dimensions rectangular draught shield - outer (W×D×H)	144×139×81 mm
Dimensions completely mounted (W×D×H)	220×340×180 mm
Material housing	plastic
Material weighing plate	stainless steel
Material platform	Stainless steel
Material draught shield	plastic, glass
Dimensions weighing surface (Ø)	120 mm
Material load cell(s)	aluminium
Levelling feet adjustable	✓

## Functions

Number of keys for operation	7
Auto-off interval(s) in battery mode/rechargeable battery mode	5 min 2 min 1 min 30 min 60 min 30 sec
Capacity - Display	✓
PreTare function	✓
Tare function	manual (multi)
Hold function	✓
Percentage determination	✓
Counting function	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual

## Category

Brand	KERN
Product category	Laboratory balance
Product group	Precision balance
Product family	EWJ

## Measuring System

Construction type of the scale	Single-range balance
Weighing system	Strain gauge
Weighing capacity [Max]	600 g
Readability [d]	0,01 g
Resolution	60.000
Linearity	± 0,03 g
Reproducibility	0,01 g
Tare range	599,99 g
Default unit	g
Units	g
Units (if device is conformity assessed)	g
Minimum weight [Min]	0,5 g
USP Minimum weight of sample (k = 2, U = 0.1%)	20 g
Adjustment options	Internal calibration (automatic)
Automatic adjustment - Standard time interval	2 h
Stabilization time	2 s
Warm-up time	120 min
Eccentric loading at 1/3 [Max]	0,03 g
Loadcell type	aluminium IP65 silicone-coated

# KERN EWJ 600-2M

High-quality precision balance with automatic internal adjustment, verification optional

Function for averaging under unstable weighing conditions	✓
Recipe/summing level	Rez A (Net total)
Interfaces	RS-232 standard Bluetooth BTC (v2.0) (optional, factory) Bluetooth BLE (v4.0) (optional, factory) USB-Device
IP protection - display	no IP protection
IP protection - load cell	IP65

Counting	
Smallest piece weight when piece counting - laboratory conditions	20 mg
Smallest piece weight when piece counting - normal conditions	200 mg
Counting reference weight can be entered	✓
Reference quantity	5, 10, 20, 50, free, Input
Counting resolution (laboratory conditions)	30.000

Power Supply	
Input voltage power supply / power [Max]	100 V - 240 V, 50 / 60 Hz
Input voltage device / power [Max]	12 V, 500 mA
Plug-in power supply type	Power adapter
Supplied power supply	Power supply unit
Plug-in power supply / adapter for countries - included with the delivery	EURO UK US CH

Plug-in power supply / adapter for countries - optional	EURO AUS UK US CH
---	-------------------------------

Rechargeable battery optional	Rchrg. battery optional - intern
Rechargeable battery charging time	6,5 h
Rechargeable battery operating time - backlight on	32 h
Rechargeable battery operating time - backlight off	57 h
Battery / accumulator type	Pb
Battery connection	2-pole tub connector

Environmental conditions	
Humidity of environment [Max]	80 %
Ambient temperature [Min]	15 °C
Ambient temperature [Max]	30 °C

Packing & Shipping	
Readability force [d] (N)	1 d
Dimensions packaging (W×D×H)	390×280×175 mm
Net weight	3,1 kg
Shipping method	Parcel service
Net weight approx.	3,2 kg
Gross weight approx.	3,6 kg
Shipping weight	3,8 kg

Services (optional)	
Article number for conformity assessment	965-216
Article number for DAkkS calibration	963-127
Article number for certificate of conformity (verification)	969-517

## Pictograms

### STANDARD



### OPTION



### FACTORY

